

**REVOLVE120  
Suspension Luminaire**





## REVOLVE120 Suspension Luminaire

### Robust Wall & Ceiling Mounted Luminaire

REVOLVE120 Suspension luminaire reflects a contemporary design and simplicity for a stylish look and feel. It's high efficiency LED technology results in >50% energy savings as compared to the conventional luminaire. This suspension mounted luminaire can be installed independently or continuously, with uniform light color, softness and comfort of a glare-free and flicker-free lighting.

### Features and Benefits

#### Stylish Look & Feel

Sleek and Elegant product design with differing product width/length options. Available in 3 different sizes (width: 70mm, 100 mm, 120 mm and length: 600mm, 1200mm) with slim profile suspension mounting accessories.

#### Excellent Uniformity

Uniform light distribution with low glare and comfortable lighting.

#### High Efficacy

High CRI >80 with excellent efficacy of >90 lm/W with long lifetime of 50,000 hours.

#### Flexible and Versatile

Suspension mounting with multiple accessory options to join the luminaires for continuous mounting and adjust product height as per need.

#### Flicker Free

Flicker free for better visual comfort.

**Stylish and energy-efficient suspension mounted luminaire for office areas, meeting rooms and general area lighting for commercial spaces.**



### Applications

- Office Lighting
- Meeting Rooms
- Reception Areas
- Indoor Commercial Spaces
- General Indoor Area Lighting

Energy Efficient

Multiple Width Options

Black and White Body Color

Stylish Look and Feel

## Technical Specifications

	Specifications
Lumen output (Typ.Avg) (±10%)	W12L1200 – 3000lm / W12L600 – 1500lm W07L1200 – 2600lm / W07L600 – 1300lm; W10L1200 - 2900lm
CRI	≥80
CCT	4000K/6500K
SDCM	≤5
Input Voltage and Frequency	220-240VAC, 50/60hz
Safety Class (Driver+System)	Class I
Power Factor (System)	>0.9
Power consumption (System) (±10%)	W12L1200 – 34W / W12L600 – 16W W07L1200 – 28W / W07L600 – 14W ; W10L1200 -32W
System Efficacy (±10%)	88-93lm/W
THD	<30%
Surge Protection	L600:0.5KV/1KV; L1200:1KV/2KV
Material	Housing: SPCC ; Diffuser: PC
IP/IK	IP20 / IK02
Mounting	Suspended
Color(s) (and RAL code)	White ; Dark Grey
Size (LxWxH) + Considerations	L600xW120xH50;L1200xW120xH50;L600xW70xH50; L1200xW70xH50;L1200xW100xH50;
Packaging Concept	2 in 1 with brown box, no inner box
Lifetime	50,000hrs L65B50 @Ta 25°C
Approbation	CB/EMC
Accessory	Suspension Kit & Joining Kit (separate codes to be ordered)

\*Data subject to change

## Product List

Product Description
REVOLVE120 RNS 13S/865 0760 BK
REVOLVE120 RNS 13S/840 0760 BK
REVOLVE120 RNS 26S/865 07120 BK
REVOLVE120 RNS 26S/840 07120 BK
REVOLVE120 RNS 15S/865 1260 BK
REVOLVE120 RNS 15S/840 1260 BK
REVOLVE120 RNS 30S/865 12120 BK
REVOLVE120 RNS 30S/840 12120 BK
REVOLVE120 RNS 29S/865 10120 BK
REVOLVE120 RNS 13S/865 0760 WH
REVOLVE120 RNS 26S/840 07120 WH
REVOLVE120 RNS 15S/840 1260 WH
REVOLVE120 RNS 15S/865 1260 WH
REVOLVE120 RNS 30S/865 12120 WH
REVOLVE120 RNS 30S/840 12120 WH
REVOLVE120 RNS 29S/865 10120 WH
REVOLVE120 RNS 29S/840 10120 WH

\*Data subject to change

## Accessories

### Suspension Kit (Optional)

REVOLVE120 RNS Suspending accessory




### Connection / Joining Kit (optional)

REVOLVE120 RNS connection W07

REVOLVE120 RNS connection W10

REVOLVE120 RNS connection W120

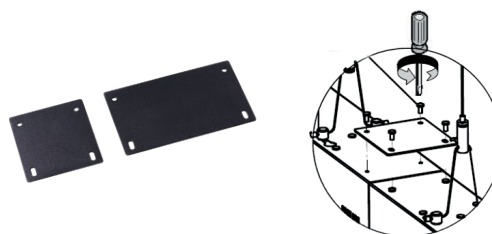

## Product Dimensions

