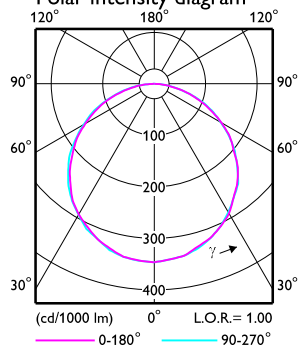



REVOLVE120 PNL IP44 41S 6060 1xLED

1 x 4100 lm

Polar intensity diagram

Light output ratio 1.00
Service upward 0.00
Service downward 1.00

CIE flux code 46 78 95 100 100

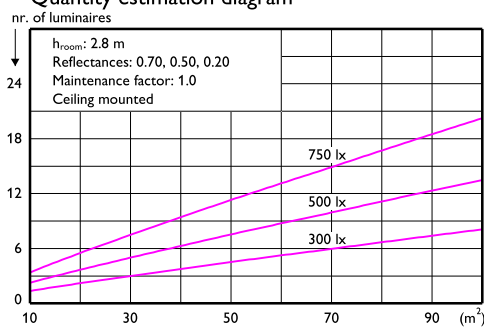Quantity estimation diagram**Utilisation factor table**

Room Index k	Reflectances for ceiling, walls and working plane (CIE)															
	0.80	0.80	0.70	0.70	0.70	0.70	0.50	0.50	0.30	0.30	0.00	0.80	0.80	0.70	0.70	0.70
0.60	0.47	0.45	0.47	0.46	0.45	0.37	0.37	0.32	0.36	0.32	0.30	0.47	0.45	0.47	0.46	0.45
0.80	0.58	0.55	0.57	0.56	0.54	0.46	0.46	0.41	0.45	0.40	0.38	0.58	0.55	0.57	0.56	0.54
1.00	0.67	0.62	0.66	0.64	0.62	0.54	0.53	0.48	0.52	0.48	0.46	0.67	0.62	0.66	0.64	0.62
1.25	0.76	0.70	0.74	0.71	0.69	0.62	0.61	0.56	0.60	0.55	0.53	0.76	0.70	0.74	0.71	0.69
1.50	0.82	0.75	0.80	0.77	0.74	0.67	0.66	0.61	0.65	0.61	0.58	0.82	0.75	0.80	0.77	0.74
2.00	0.92	0.83	0.90	0.86	0.82	0.76	0.75	0.70	0.73	0.70	0.67	0.92	0.83	0.90	0.86	0.82
2.50	0.99	0.88	0.96	0.91	0.86	0.82	0.80	0.76	0.79	0.76	0.73	0.99	0.88	0.96	0.91	0.86
3.00	1.04	0.91	1.01	0.95	0.90	0.86	0.84	0.81	0.83	0.80	0.77	1.04	0.91	1.01	0.95	0.90
4.00	1.10	0.95	1.07	1.00	0.94	0.91	0.89	0.86	0.87	0.85	0.82	1.10	0.95	1.07	1.00	0.94
5.00	1.14	0.98	1.10	1.03	0.97	0.94	0.92	0.90	0.90	0.88	0.85	1.14	0.98	1.10	1.03	0.97

Ceiling mounted

Luminance Table

Plane	0.0	45.0	90.0
Cone			
45.0	3824	3817	3792
50.0	3691	3686	3745
55.0	3690	3597	3654
60.0	3541	3533	3513
65.0	3374	3374	3441
70.0	3218	3230	3322
75.0	3008	3079	2983
80.0	2535	2685	2597
85.0	2227	1891	2426
90.0	-	-	-

(cd/m²)

LVC2160365

2023-10-07